

LED直流旋轉燈管-可串接

LED DC Rotatable Tube

- Connectable

Data Sheet

GLT-AL01

Contact us :

TEL + 886-6-243-6726

FAX + 886-6-243-2110

Mail : mftsai@glt-corp.com.tw

Add : No.35, Ln. 190, Zhengnan
1st St., Yongkang Dist.,
Tainan City 710, Taiwan (R.O.C.)



IP65 CE RoHS



Feature

■ MagEZ System

Easy to install and maintain

■ RotaLight Technology

Easily change the direction of light output

■ Energy savings over 50% compared with fluorescent tube

■ Long life time : 40,000hrs

■ Waterproof Options : IP65

■ Connectable



Magnetic(optional)

Application

■ Architectural Lighting

■ Agricultural Lighting

■ Refrigeration Lighting

■ Advertising Lighting

■ Indoor Lighting (Office Classroom Hospital & Factory etc)


■ Home Lighting (Living room, Bed room & Kitchen etc)

■ Commercial Lighting (Show room, Restaurant, Supermarket & Parking lot)




Product Description

■ Radiation Diagram (with Diffuser)

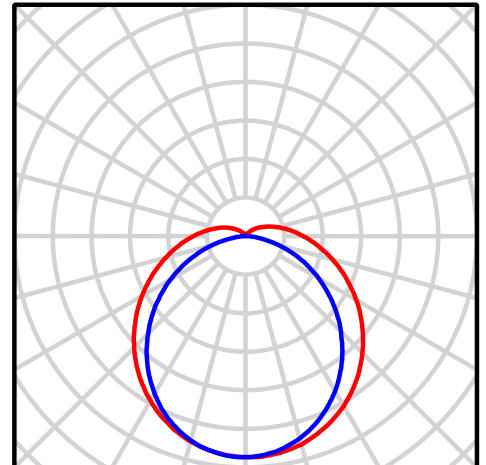

產品說明 Description	1 呎 1 foot	2 呎 2 feet	3 呎 3 feet	4 呎 4 feet
輸入電壓 Input Voltage	12.5~16 VDC / 23~26VDC			
消耗功率 Power Consumption	5.4W	10.8W	16.2W	21.6W
光通量 Luminous Flux	450 lm	900 lm	1350 lm	1800 lm
色溫 CCT	3000K / 4000K / 5000K / 6000K			
燈具效率 Efficiency	83.3 lm/W (5000K, with Diffuser)			
演色性指數 CRI (Ra)	85			
燈罩種類 Cover Type	Diffuser / Optical Diffuser / Transparent			
本體材質 Sink Material	AL6063			
尺寸 (直徑x長) Size(Φ*L) (mm)	Φ37 x 322	Φ37 x 607	Φ37 x 892	Φ37 x 1177
淨重 Net Weight (g)	220	305	410	515

Product Dimension

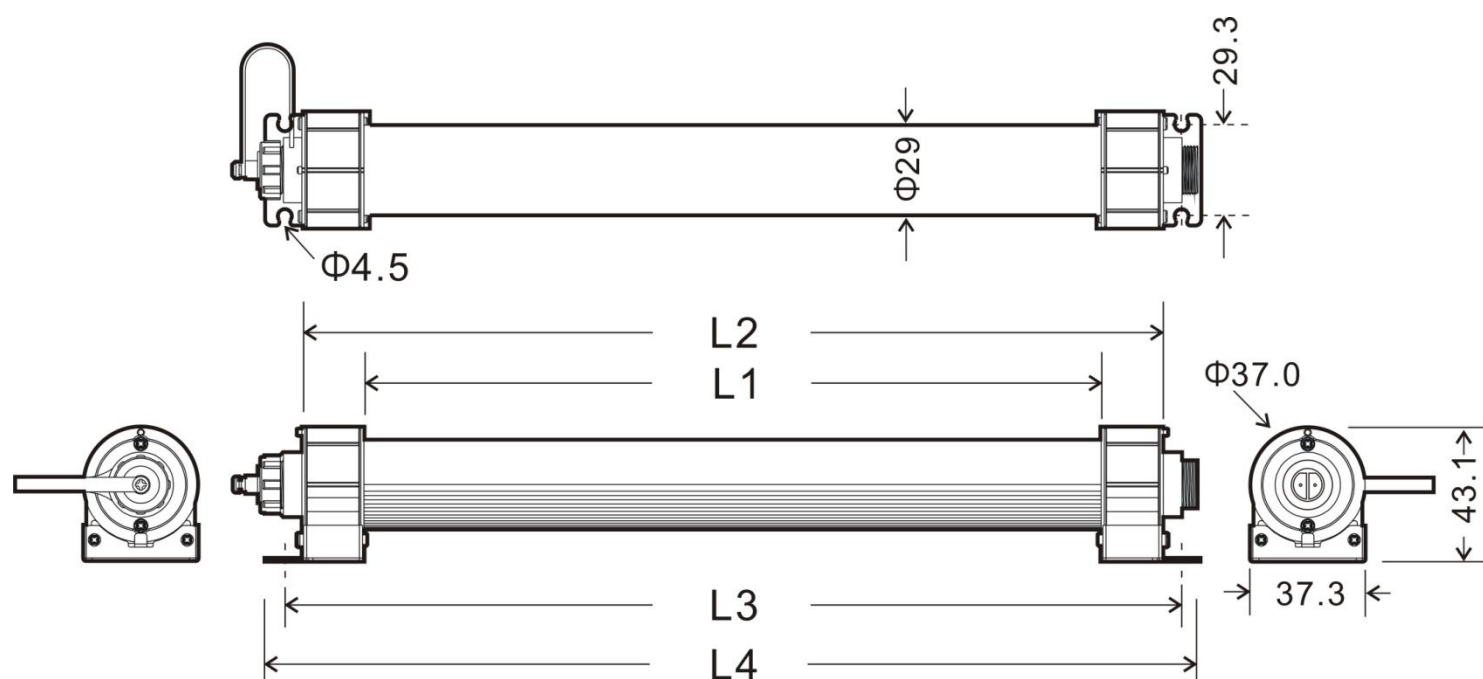

尺寸 Dimension	1呎 1 foot	2呎 2 feet	3呎 3 feet	4呎 4 feet
L1 (mm)	281.6	566.6	851.6	1136.6
L2 (mm)	321.6	606.6	891.6	1176.6
L3 (mm)	333	618	903	1188
L4 (mm)	345.6	630.6	915.6	1200.6
直徑 Diameter (mm)	$\Phi 37$			
高 Height (mm)	43.1			